



Green Ballast Daylight Harvesting Ballast

Programmed Start Dimming Electronic Fluorescent Ballast
Self-Contained Automatic Lighting Control

APPLICATION and PERFORMANCE SPECIFICATION

GB3T832DHB-U

3-Lamp 32 Watt T8

| Catalog Number | Dip Switch Tuning | | Input Watts | Input Amps | Ballast Factor |
|----------------|-------------------|--|-------------|------------|----------------|
| GB3T832DHB-U | 100% - Min | | 91/10 | 0.76 | 0.88 |
| | 90% | | 80 | 0.67 | 0.72 |
| | 80% | | 75 | 0.63 | 0.66 |
| | 70% | | 64 | 0.53 | 0.53 |
| | 60% | | 62 | 0.52 | 0.51 |
| | 50% | | 53 | 0.44 | 0.41 |
| | 40% | | 48 | 0.40 | 0.34 |
| Max Dimming | | | 16 | | |

Total Harmonic Distortion <10% at full output. Power Factor > 98% Lamp Crest Factor <1.7%

Performance:

- Meets NEMA Standard LL9-2009
- Meets ANSI Standard C62.41
- Meets FCC Title 47 CFR, Class A Part 18
- ISO 9002 Manufactured

Safety


- No PCB's
- UL C-US Listed

Application Parameters

- Minimum Starting Temperature 32° F
- 5 Year Limited Warranty
- Sound Rating Class A

Physical

| | |
|--------|----------|
| Length | 17.0" |
| Width | 2.25" |
| Height | 1.0" |
| Weight | 1.10 lbs |

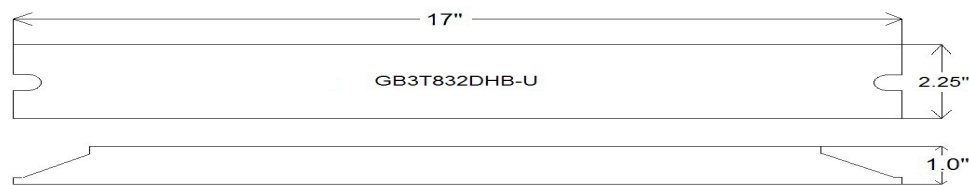

Application and Performance Information Subject to Change without Notification

