



Green Ballast Daylight Harvesting Ballast

Programmed Start Dimming Electronic Fluorescent Ballast
Self-Contained Automatic Lighting Control

APPLICATION and PERFORMANCE SPECIFICATION

GB4T832DHB-U

4-Lamp 32 Watt T8

Catalog Number	Dip Switch Tuning		Input Watts	Input Amps	Ballast Factor
GB4T832DHB-U	100% - Min		115/20	0.94	0.88
	90%		97	0.81	0.66
	80%		90	0.75	0.60
	70%		79	0.66	0.50
	60%		75	0.63	0.47
	50%		65	0.54	0.38
	40%		58	0.48	0.32
Max Dimming			30		

Total Harmonic Distortion <10% at full output. Power Factor > 98% Lamp Crest Factor <1.7%

Performance:

- Meets NEMA Standard LL9-2009
- Meets ANSI Standard C62.41
- Meets FCC Title 47 CFR, Class A Part 18
- ISO 9002 Manufactured

Safety


- No PCB's
- UL C-US Listed

Application Parameters

- Minimum Starting Temperature 32° F
- 5 Year Limited Warranty
- Sound Rating Class A

Physical

Length	17.0"
Width	2.25"
Height	1.0"
Weight	1.10 lbs

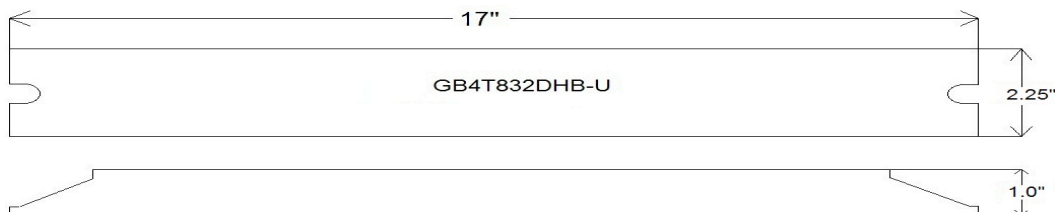

Application and Performance Information Subject to Change without Notification



Green Ballast, Inc. / 2620 Thousand Oaks Blvd / Suite 4000 / Memphis, TN 38118-2473
Phone (901) 260-4400 / fax (901) 260-4401 / greenballastinc.com